




Specifications

System	3 phases 4 wires
Voltage	440 - 480 VCA
Supply voltage (depending on customer's on customer's need)	2400, 4160, 6600, 13200, 13800 24000 o 34500 VOLTS CA.
Secondary voltage	480Y / 277 VCA.
Frequency	60 Hz.
Tension of own services	240 / 127 VCA.

Transformer specifications

KVA capacity (depending on customer customer's need)	300, 500, 750, 1000, 1250, 1500, 2000 3000 KVA.
BIL at primary	30 KV.
BIL at the secondary	10 KV.
Windings	Copper - copper
Tem. Rise (option)	80, 115 o 150 °C above the average ambient temperature of 30°
Impedance	3% - 5%
Isolation	392 °F
Referrals	+2/-2 @2.5%
Operating altitude	2500 MSNM
RTD	100 Ohm. Including one in each winding
Lightning arresters	Suitable for power supply coltage

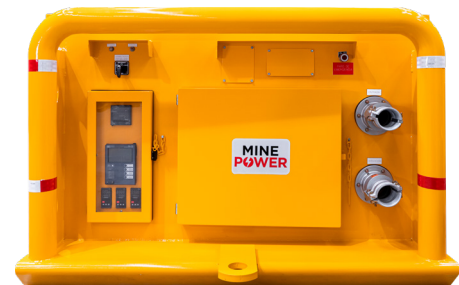

Optional specifications

Mains circuit breaker

- Vacuum interrupter
- Air circuit breaker
- Mixed system with grounding (load)

Options

- We have extensive experience in serving, upgrading and repairing indoor mining equipment.
- Extensive inventory of spare parts

Note: Stainless steel cabinet, receptacles and outlets of your choice are available upon request.
If you have any questions, please contact our sales department at **(871) 731 89 41**.